



# Dell XPS 13 L321X Wireless Card Replacement

How to replace the wireless card. It is recommended to check troubleshooting before replacing the wireless card.

Written By: Molly Skinner



## INTRODUCTION

WIFI not working or slow? Replace it (only screwdrivers required).

---



### TOOLS:

- [T4 Torx Screwdriver](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-




## Step 1 — Wireless Card



- Remove ten 3mm screws from the back cover with a T4 screwdriver.


## Step 2

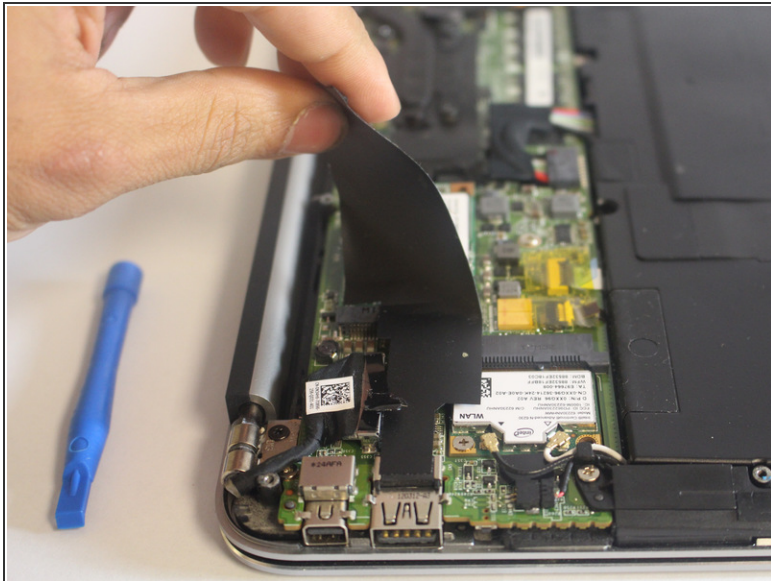

- Remove the black tape covering the RAM and wireless card with your hands.



## Step 3

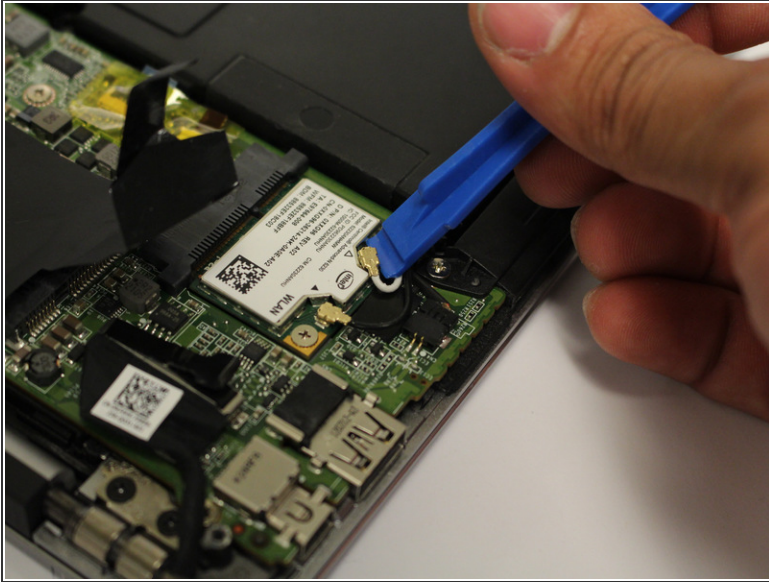


- Use a plastic iFixit opening tool to remove the two wires connected to the wireless card.

## Step 4



- Use a **PH00** screwdriver to remove the one 3mm screw that holds the wireless card in place.

## Step 5

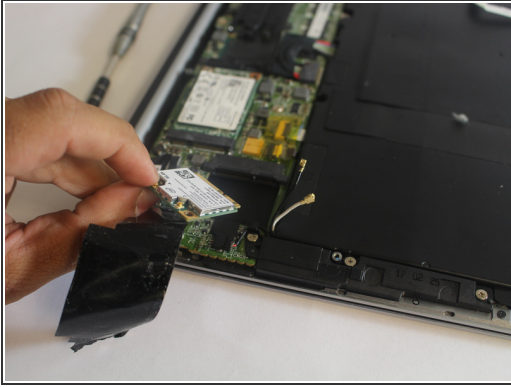

- Use your hand to remove the wireless card.

---

This document was last generated on 2017-06-19 08:07:26 AM.